




RSS TRANSMITTER Rapid Shutdown Activator for TS4-F

The Tigo Rapid Shutdown System (RSS) Transmitter is part of a rapid shutdown solution when paired with Tigo TS4-F (Fire Safety), a PV module rapid shutdown unit. While powered on, the RSS Transmitter sends a signal to the TS4-F units to keep their PV modules connected and supplying energy.

TS4-F units automatically enter rapid shutdown mode when the RSS Transmitter is switched off and resume energy production when power is restored to the RSS Transmitter. This solution complies with NEC 690.12 specifications for 2014, 2017, and 2020 and uses PLC signaling for rapid shutdown.

The RSS Transmitter includes one or two RSS Cores, and a 120/240V_{AC} power supply is available separately.

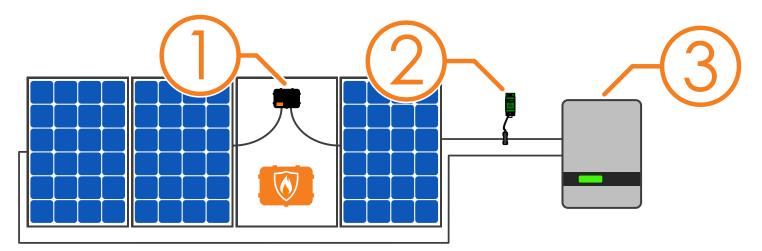


1. Modules equipped with Tigo TS4-F (Fire Safety)


- 2. Tigo RSS Transmitter and RSS Core
- 3. Inverter

RSS TRANSMITTER

Meets NEC 690.12 requirements Module-level deactivation with TS4-F Automatic or manual shutdown Includes one or two RSS Cores Optional 120/240V_{AC} power supply







RSS Transmitter - Front View

RSS Transmitter - Side View


0

RSS Core - Side View All dimensions in mm

Input		
Transmitter Input Voltage: 12V _{DC} (+/- 2%)		
ransmitter Input Current: 1A		
RSS Core		
Max Current: 150A per RSS Core (Single Core: 150A, Dual Core: 300A)		
Max String Voltage: 1500V _{DC}		
Max Number of Strings per Core: 10		
Max Supported PV Modules per String: 30		
Environmental		
Operating Temperature Range: -40°C to 85°C		

For Tigo RSS Transmitter integration inside an inverter, be able to provide the following power profile:

- Voltage: 12V_{DC} (+/- 2%)
- Power Average: 0.85W •
- Power Standby: 0.06W
- Duty Cycle: 15%
- Max Power: 5.5W

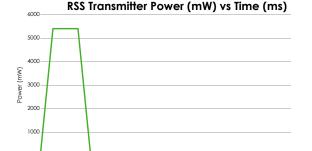

50 100 150 200 250 300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000 Time (ms)

ORDERING OPTIONS

	490-00000-10	Single Core (150A) RSS DIN Rail Transmitter (no power supply)
	490-00000-20	Dual Core (300A) RSS DIN Rail Transmitter (no power supply)
	983-01512-00	DIN Rail Power Supply, 12V _{DC} , 1.25A

For sales info:

sales@tigoenergy.com or 1.408.402.0802

For technical information:

http://support.tigoenergy.com

Photovoltaic Rapid Shutdown System Equipment, QIJW

For product info:

Visit www.tigoenergy.com/products

For technical info:

http://support.tigoenergy.com

For additional info and product selection assistance, use Tigo's online design tool at www.tigoenergy.com/design

Tigo Energy, Inc. 655 Campbell Technology Pkwy Suite 150, Campbell, California 95008 USA www.tigoenergy.com P: +1.408.402.0802 F:+1.408.358.6279 | sales@tigoenergy.com